



37×16.5×17.1

NV2R

Patent No.: 95221385.0

Features

- Small size, lightweight.
- Withstands high temperature, operating under 105°C ambient temperature.
- Heavy contact load switching current up to 10A.

Ordering Information

NV2R S DC12V 0.64
 1 2 3 4

1 Part number: NV2R
 2 Enclosure: S: Sealed type; Z: Dust cover
 3 Coil rated voltage(V): DC: 12
 4 Coil power consumption: 0.64:0.64W; 0.93:0.93W

Contact Data

Contact Arrangement	2×1C (2×SPDT(B-M)) (H-Bridge)		
Contact Material	AgSnO ₂		
Contact Rating (resistive)	10A/14VDC		
Max. Switching Power	140 W		
Max. Switching Voltage	24VDC	Max. Switching Current:10A	
Contact Resistance or Voltage drop	<50mΩ	Item 4.12 of IEC 61810-7	
Operation life	Electrical	10 ⁵	Item 4.30 of IEC 61810-7
	Mechanical	10 ⁷	Item 4.31 of IEC 61810-7

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max)	Release voltage VDC(min)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
012-640	12	14.4	225	6.8	1.2	0.64	<10	<5
012-930	12	14.4	155	6.0	0.9	0.93		



CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
 2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition

Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC 61810-5
Dielectric Strength		
Between contacts	50Hz 1000V	Item 6 of IEC 61810-5
Between contact and coil	50Hz 1000V	Item 6 of IEC 61810-5
Shock resistance	100m/s ² 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~40Hz double amplitude 1.27mm	IEC68-2-6 Test Fc
Terminals strength	10N	IEC68-2-21 Test Ua1
Solderability	235°C ± 2°C 3 ± 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-40~105°C	
Relative Humidity	85% (at 20°C)	IEC68-2-3 Test Ca
Mass	25g	

Dimensions

mm /inch

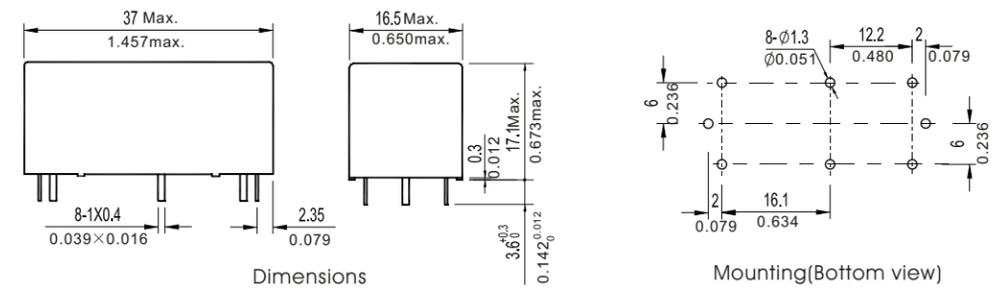

Wiring diagram(Bottom view)

NOTES 1).Dimensions are in millimeters.
 2).Inch equivalents are given for general information only.

Reference Data

