

## JK6 SERIES OF POLYMER PTC RESETTABLE FUSE SPECIFICATION

**Appearance of Products :**




Figure 1

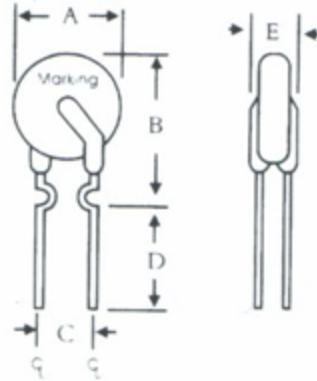


Figure 2

**Electrical characteristics (25°C)**

Model	V <sub>max</sub> (V)	I <sub>max</sub> (A)	I <sub>h</sub> (mA)	R <sub>max</sub> (Ω)	R <sub>min</sub> (Ω)	Pd (W)	Fig.	Maximum Contour Size(mm)				
								A	B	C	D	E
JK6-075	6	40	0.75	0.230	0.14	0.3	2	6.90	11.4	5.10	7.60	3.10
JK6-090	6	40	0.90	0.180	0.10	0.6	1	7.40	12.2	5.10	7.60	3.10
JK6-110	6	40	1.10	0.140	0.08	0.7	1	7.40	14.2	5.10	7.60	3.10
JK6-120	6	40	1.20	0.140	0.08	0.6	2	6.90	11.7	5.10	7.60	3.10
JK6-135	6	40	1.35	0.115	0.06	0.8	1	8.90	13.5	5.10	7.60	3.10
JK6-160	6	40	1.60	0.110	0.05	0.9	1	8.90	15.2	5.10	7.60	3.10
JK6-185	6	40	1.85	0.085	0.05	1.0	1	10.2	15.7	5.10	7.60	3.10
JK6-250	6	40	2.50	0.060	0.03	1.2	1	11.4	18.3	5.10	7.60	3.10